

**CD CABLE TIES**



**STAINLESS STEEL BALL LOCK CABLE TIES**

**STAINLESS STEEL BANDS**

**STAINLESS STEEL LADDER CABLE TIES**

**STAINLESS STEEL MARKERS AND TAGS**

**STAINLESS STEEL RELEASABLE CABLE TIES**

**MANUFACTURE OF SS CABLE TIES  
CD CABLE TIE IS A BRAND OF CD TRADERS**



B-302, Rosedale Apartment, Nr, Nilamber circle, Vasna Bhayali road, Tp-1, Vadodara- 391410



+91 7433881097



+91 7575862328



cdtraders02@gmail.com

## ABOUT US


We are the prominent manufacturer and supplier of coated and uncoated SS Ball Lock Cable ties, SS Ladder cable Ties, SS Releasable Cable Ties, SS Band, SS Markers and Tags. We are committed to the fast, accurate, valued and ethical work method. By making continuous effort to deepen technology, we make great efforts to meet and to go beyond the customer's expectations.

## ADVANTAGE OF BUYING CD PRODUCTS

- ✓ Experience for quality management system.
- ✓ Team of highly skilled engineers.
- ✓ Both Quality control and inspection system.
- ✓ Strict quality control and inspection system.
- ✓ Timely delivery.
- ✓ Product tryout before reaching to your facility.

## CD PRODUCTS

Stainless steel ball lock cable ties | Stainless steel ladder cable ties  
Stainless steel releasable cable ties | Stainless steel bands  
Stainless steel markers and tags

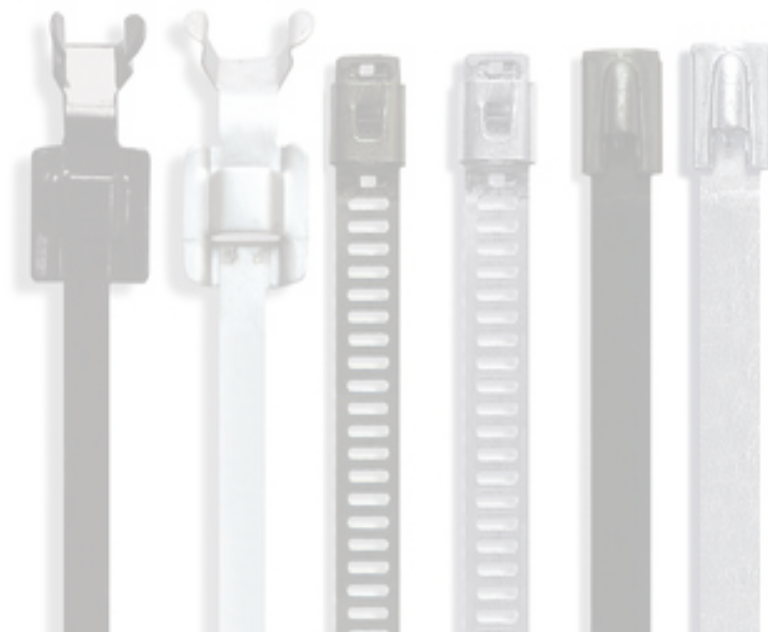

# CD CABLE TIES

## STAINLESS STEEL BALL LOCK CABLE TIES

CD cable ties are designed and manufactured for safe and fast installation that provide self locking with high tensile strength.

**Resistant to toxic chemical, corrosion, weather and UV**

Approx Operating Temperature  
 -60° C to + 500° C for Uncoated  
 -60° C to + 150° C for coated

**Minimum loop tensile strength**

4.6 mm width uncoated - 120 lbs  
 4.6 mm width coated - 100 lbs  
 7.9 mm width uncoated - 250 lbs  
 7.9 mm width uncoated - 230 lbs

### BALL LOCK TYPE COATED – 4.6 mm Width, SS-316

PART CODE	WIDTH(in mm)	LENGTH(in mm)	MAXIMUM BUNDLE DIA(in mm)
CD 46CT100	4.6	100	20
CD 46CT150	4.6	150	35
CD 46CT200	4.6	200	50
CD 46CT260	4.6	260	70
CD 46CT300	4.6	300	85
CD 46CT360	4.6	360	100
CD 46CT450	4.6	450	132
CD 46CT520	4.6	520	158
CD 46CT680	4.6	680	189
CD 46CT840	4.6	840	260
CD 46CT1000	4.6	1000	310

### BALL LOCK TYPE UNCOATED – 4.6 mm Width, SS-316

PART CODE	WIDTH(in mm)	LENGTH(in mm)	MAXIMUM BUNDLE DIA(in mm)
CD 46UC100	4.6	100	20
CD 46UC150	4.6	150	35
CD 46UC200	4.6	200	50
CD 46UC260	4.6	260	70
CD 46UC300	4.6	300	85
CD 46UC360	4.6	360	100
CD 46UC450	4.6	450	132
CD 46UC520	4.6	520	158
CD 46UC680	4.6	680	189
CD 46UC840	4.6	840	260
CD 46UC1000	4.6	1000	310

Available in different sizes with different material specification as per above.

**Size:** 4.6mm, 7.9mm, 12mm, 16mm

**material:** SS316/SS 304 (coated and uncoated)

**Cable tie length :** 50mm to 1000mm

(As per standards and customer requirements)

Special Requirement ball lock cable ties:

**Spring cable ties**

**Name/Mark punched cable ties**



# CD CABLE TIES

## STAINLESS STEEL LADDER TYPE CABLE TIE

CD cable ties are designed and manufactured multiple locking systems that enhanced strip body flexibility. Main feature of these type of CD cable ties are fast and easy installation.

<b>Approx Operating Temperature</b>	<b>Minimum loop tensile strength</b>
-70° C to + 500° C for Uncoated	7 mm width uncoated - 100 lbs
-70° C to + 150° C for coated	12 mm width coated - 250 lbs

Available in different sizes with different material specification as per below,

**Size:** 7mm, 12mm, above , **material:** SS316/SS 304

**Cable tie length :** 50mm to 1000mm

(As per standards and customer requirements)



## STAINLESS STEEL RELEASABLE CABLE TIES

CD cable ties are designed and manufactured for reliable fastening unfastening and refastening process. These cable ties are resable type plus it can also provide double wrapped installation for extra strength. Resistant to toxic Chemical , Corrosion, Weather & UV.

<b>Approx Operating Temperature</b>	<b>Minimum loop tensile strength</b>
-60° C to + 500° C for Uncoated	6.3 mm width uncoated - 350 lbs
-60° C to + 150° C for coated	6.3 mm width coated - 300 lbs
	9.5 mm width uncoated - 450 lbs
	9.5 mm width coated - 450 lbs

### RELEASABLE TYPE UNCOATED – 6.3 mm Width, SS-316

PART CODE	WIDTH(in mm)	LENGTH(in mm)	MAXIMUM BUNDLE DIA(in mm)
CD63RUC150	6.3	150	35
CD63RUC230	6.3	230	60
CD63RUC300	6.3	300	85
CD63RUC330	6.3	330	95
CD63RUC450	6.3	540	130
CD63RUC520	6.3	520	155
CD63RUC630	6.3	630	190
CD63RUC760	6.3	760	230
CD63RUC850	6.3	850	260
CD63RUC1000	6.3	1000	300

Available in different sizes with different material specification as per below,

**Size:** 6.3mm, 9.5mm and above

**Material:** SS316/SS 304 (Coated and uncoated)

**Cable tie length :** 50mm to 1000mm (As per standards and customer requirements)



# CD CABLE TIES

## STAINLESS STEEL BANDS

We offer jaw and wing type bands. Our CD bands are used to create reusable ties of different lengths.

**Stainless steel 201 is generally use for this application.**

Bands with widths of 6.35mm, 9.53mm, 12.7mm, 15.88mm and 19.01 and thickness 0.33mm with lengths are available.



## STAINLESS STEEL MARKERS AND TAGS

We offer wide range of CD manufactured markers and tags that are used to identify different parts of the system.




DESCRIPTION	PRODUCT CODE	DIMENSIONS width x length (in mm)
Tag	<b>CD</b> -3463	34 x 63
Tag	<b>CD</b> -1951	19 x 51
Tag	<b>CD</b> -1989	19 x 89
Tag	<b>CD</b> -1992	19 x 92
Tag	<b>CD</b> - 892	8 x 92
Tag	<b>CD</b> -8133	8 x133
Tag	<b>CD</b> -8166	8 x 166
ALPHABETS	A...Z	8 x 9
NUMBERS	0...9	8 x 9
SPECIAL CHARACTERS	+, -, ~, #, / etc	8 x 9



## Corporate Office

B-302, Rosedale Apartment,  
Nr. Nilamber Circle,  
Vasana - Bhayli Road,  
Vadodara - 391410,  
Gujarat, India.

## Contact Number

-  +91 7433881097
-  +91 7575862328
-  cdtraders02@gmail.com

**CD CABLE TIES**

**CD TRADERS**